

RC-IP300 CRAFTED FOR PRECISE MULTI-CAMERA CONTROL.



Compact yet powerful, the RC-IP300 lets a single operator command up to 200 cameras and store and recall up to 100 presets per camera for instant, precise moves. A 3.5" touchscreen preview, IP video inputs, Canon PTZ Auto Tracking app support, and ergonomic buttons and dials keep control fast, familiar, and future-ready.



Compact, control-room ready


Single-operator control

Scale to 200 cameras

Up to 100 presets per camera

3.5" touchscreen preview

IP video inputs

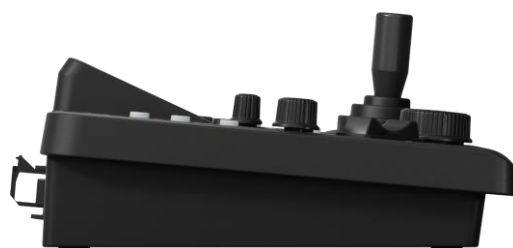



Compact design, desk-friendly power

A space-saving design, ideal for control room or auditorium while delivering pro-grade performance and reliability. Simple cabling with PoE or included 12v power adapter.



Built for single-operator speed

Natural layout of joystick, touchscreen, plus camera and preset buttons enable one person to run complex, multi-camera broadcasts with confidence and consistency.



Scale: 200 cameras, up to 100 presets each

Expand effortlessly: control up to 200 cameras in up to 20 groups, and store and recall up to 100 presets per camera for instant, repeatable, high-quality results. Initial setup can be done without a pc.



3.5" preview & video I/O

Monitor with a crisp 3.5" touchscreen video preview and streamline networks with IP video inputs. Supports Touch AF and Face Detection AF. Also supports PoE, GPIO D-sub 9 pin to link tally signal with switcher.




Canon apps & Stream Deck ready

Deep ecosystem support: works with Canon PTZ apps and integrates with Stream Deck for customisable, fast access control.

PRODUCT RANGE



RC-IP1000

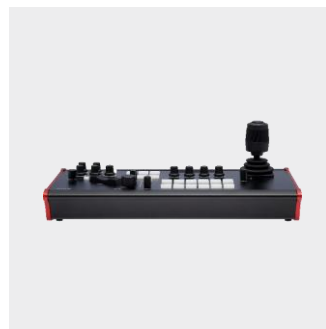

RC-SK5



RC-IP300

GENERAL

Power supply (adapter)	DC12V
Power supply (PoE)	Yes (PoE)
Exterior dimensions	W 255 mm x H 94 mm x D 180 mm (excluding protrusions)
Weight	approx. 1.4 kg
Operating temperature	0°C - 40°C
LCD Display	3.5-inch touch panel XC protocol (IP)
Supported protocols	NU protocol (Serial) Standard Communication (Serial)

CONNECTION SPECS

No. of connectible cameras	200 (IP), 1 (Serial)
No. of camera groups	20 (10 units per 1 group)

INPUT/OUTPUT

Power supply	DC jack (11.4 to 12.6V)
Video input/output	IP IN (video switch with camera selection; 2x2/3x3 multi-camera video display)
Serial Interface	RJ45 x 1
Tally/GPIO	D-sub 9pin x 1
Video display on touch panel	YES (IP)
USB	USB Type A x 1 (for firmware upgrades, saving settings, and Stream Deck connection)

MEMORY

Presets	Up to 100 for each camera (depends on camera specs)
Hard button support for presets	Yes (used with camera number buttons)
Trace	Up to 10 for each camera (depends on camera specs)

CONTROL PANEL

Menu operation	Yes (touch panel or arrow button and SET/BACK buttons)
No. of User Buttons	3 (USER1 to USER12 can be controlled from the touch panel)
Touch focus from panel	YES (IP)
No. of camera Selectable Buttons	10 (usable as preset select)

OTHER

Initial camera settings without PC	YES
Simultaneous multi-camera setup	YES

CRAFTED FOR PRECISE MULTI-CAMERA CONTROL.

RC-IP300

Compact yet powerful, the RC-IP300 lets a single operator command up to 200 cameras and store and recall up to 100 presets per camera for instant, precise moves. A 3.5" touchscreen preview, IP video inputs, Canon PTZ Auto Tracking app support, and ergonomic buttons and dials keep control fast, familiar, and future-ready.



What's in the box

RC-IP300

- RC-IP300 Main Unit
- AC Adapter
- AC Cable (EU/OTH)
- Printed Matter Unit
- Packaging

